

VGA Distributor 2-fach


The VP-200 is a full bandwidth, 1:2 High Resolution VGA Distribution Amplifier designed for computer and workstations applications. The VP-200 splits a VGA/Super-VGA/XGA graphics card output to 2 monitors, with no discernible signal degradation.

State-of-the-art video amplifying circuitry and microchip technology make the VP-200 the first choice Graphics Component Distributor. Signal bandwidth of 345 MHz allows the VP-200 to be used with the highest quality graphics workstations.

Some features and applications:

Art.-Nr.:1622

- Computer and workstation RGB distribution
- Component and RGB duplication studios (with appropriate cables+adapters), delivering undiminished quality video duplicates

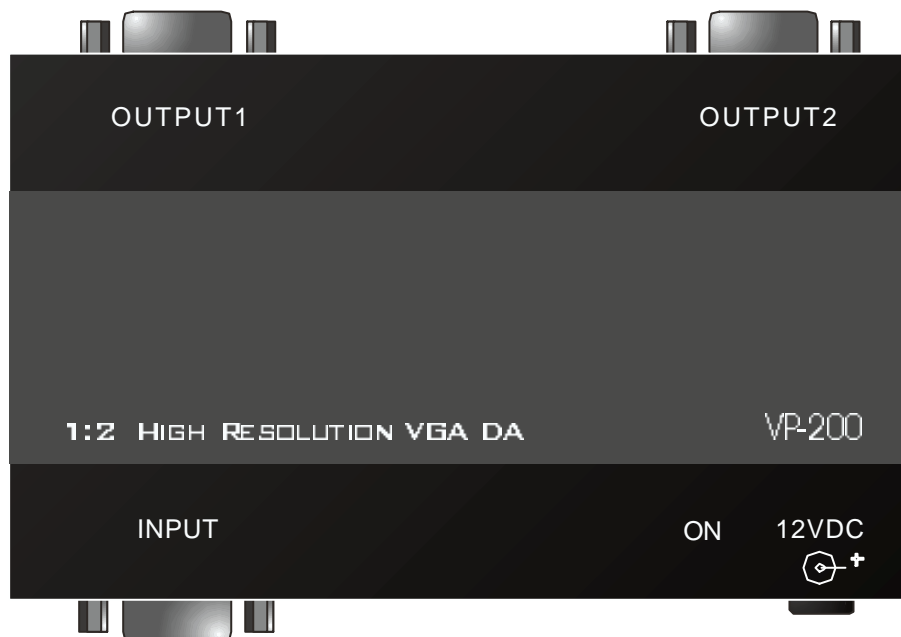

Technical Specifications:

INPUT:	Analog Red, Green, Blue signals - 0.7 Vpp/75 Ω , H & V sync, TTLlevel, onHD15Fconnector
OUTPUTS:	2 Analog Red, Green, Blue signals - 0.7 Vpp/75 Ω , H & V syncs-TTL level, onHD15F connectors
VIDEO BANDWIDTH:	Exceeding 345 MHz
DIFF. GAIN:	0.06%
DIFF. PHASE:	0.13 Deg
COUPLING:	AC
K-FACTOR:	<0.05%
S/N RATIO:	74 dB
DIMENSIONS:	12 cm X 7.5 cm X 2.5cm (W, D, H.)
POWER SOURCE:	12 VDC, 75 mA