


CLIENT NO.	TPU-0.2
LENGTH	2.88M/0.28M

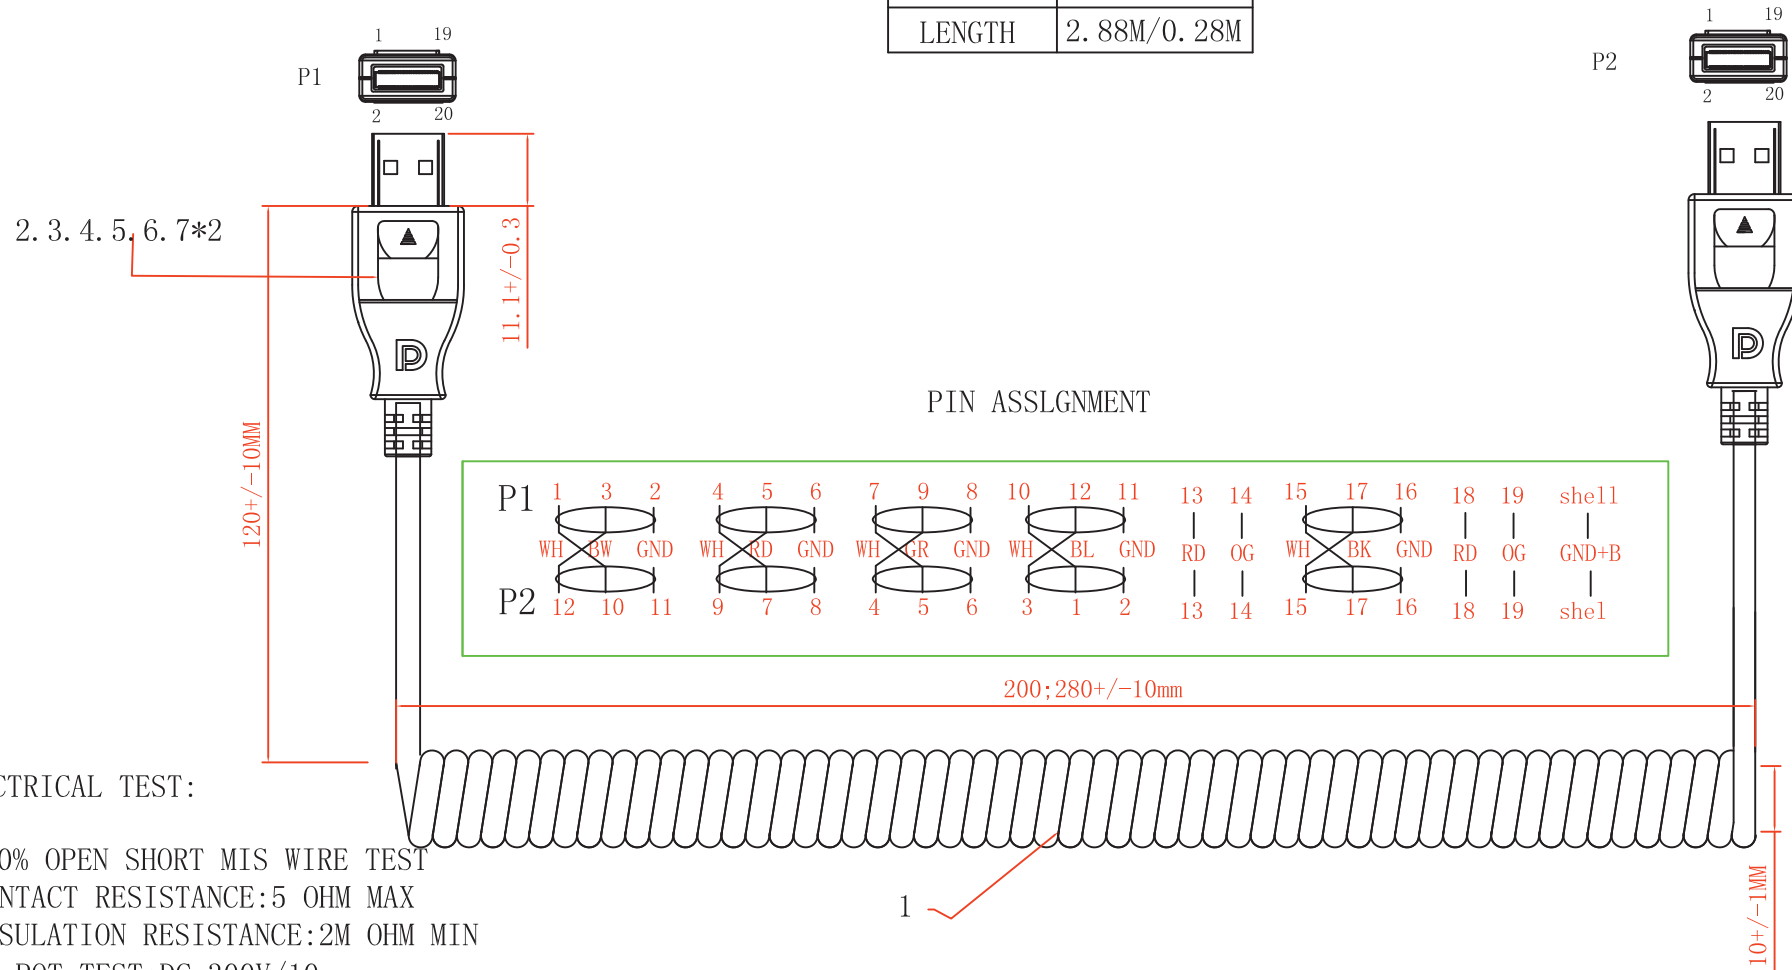

ELECTRICAL TEST:

1. 100% OPEN SHORT MIS WIRE TEST
2. CONTACT RESISTANCE:5 OHM MAX
3. INSULATION RESISTANCE:2M OHM MIN
4. HI-POT TEST:DC 300V/10ms
5. Dp/Dp cable for Dp 1.2a LEVEL

NO.	Description	Q' TY	Unit
1	32#(7/0.08TC*1P+D+AL+MY)*5P+7/0.127*1C+7/0.18TC*4C +ADB80/0.1, OD:6.0TPU, BLACK	1	PCS
2	Connector: pin with 15U gold plated, black plastic core, copper shell with nickel plated,	2	PCS
3	Cable clip: cable clip for DP connector, PA66 black	2	PCS
4	Shield shell: shield metal shell for DP connector, nickel plated, OD 6.0-6.5,	2	PCS
5	Copper foil: double copper foil W5*L35mm	2	PCS
6	Inner moldmaterial: transparent white PE	2	PCS
7	outer plastic shell: DP outer plastic shell B style, material PC+ABS	2	PCS

ComDat ELECTRONIC GmbH

PROJECTION	TOLERANCE	DESIGNED	HZM	CUSTOMER	zg	SCALE
	0 --5 ±0.2	CHECKAGE		ITEM	DPCABLE L:200/280MM DP-QR002	FREE
	5 --30±0.3	APPROVAL				SHEET
UNITS mm	30--50±0.4	DATE	2019-03-17	DWG NO.	WLD-TZ1411015-4	1/1
MODEL A4	ANGLE ±3°					